


Electromagnet Installation Guidelines

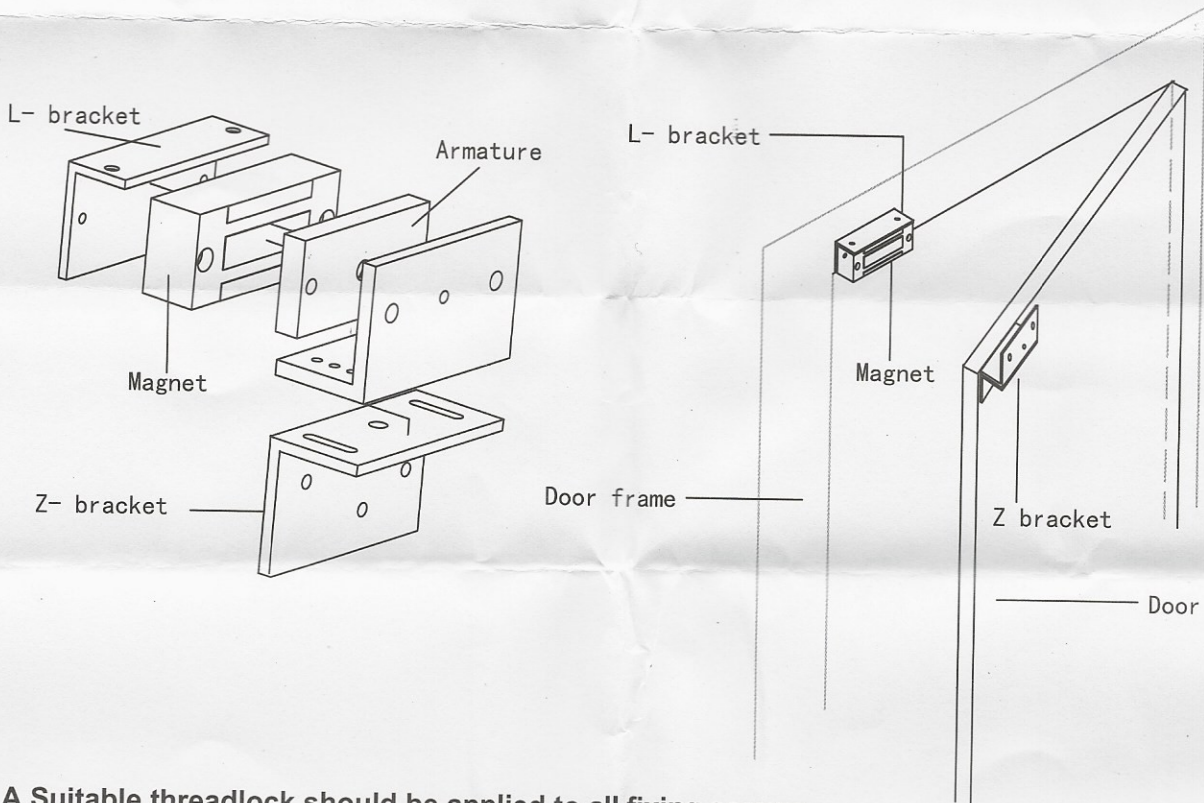

A Suitable threadlock should be applied to all fixing screws

Picture	Quantity	Specification	LOCK SERIES	Z bracket
	2	STEEL WASHER 12mm* DIA	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	1	ALLEN KEY 3mm	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	1	ARMATURE BOLT RECEIVER M5*32mmL	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	1	ARMATURE BOLT M5*35mm W/RUBBER	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	2	COUNTERSUNK SCREW M4*25mm	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	1	RUBBER WASHER 10mm DIA	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	2	GUIDE PIN 5*16mm	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	2	M4*20mm FIXING SCREW (NYLOCKED)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	1	M4*4mm MACHINE STOP SCREW	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	5	M4*7mm MACHINE SCREW	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	1	ALLEN KEY 2MM	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	3	M4*25mm COUNTERSUNK SCREW	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Electrical Specifications

Input Voltage: 12Vdc (+/- 15%)
Input Current: 140mA

Input Voltage: 24Vdc (+/- 15%)
Input Current: 70mA

