FR-A10002DS

Unmonitored Mini Magnet with Door Status

UK FIRETESTED BS EN1634:1 FD30 & FD60 DOORS


- Operating voltage 12~24Vdc *(Selectable)*
- Aluminium housing Holding force
- up to 600lbs *(272Kg)*
- Electro-less Nickel Plated Armature
- Fail-Safe
- Door status: An independent contact that works separately from the magnet to show door status not lock status
- Status LED Red Green




BS EN1634:1

OPTIONS



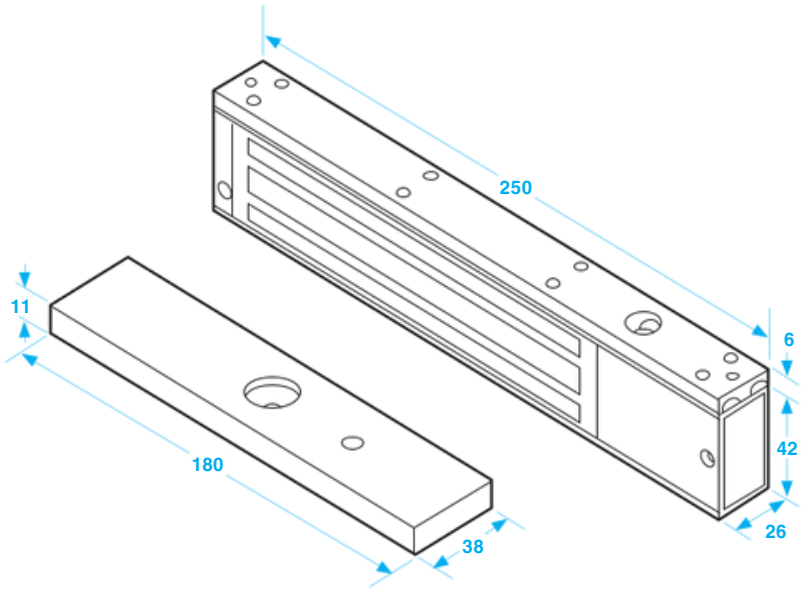

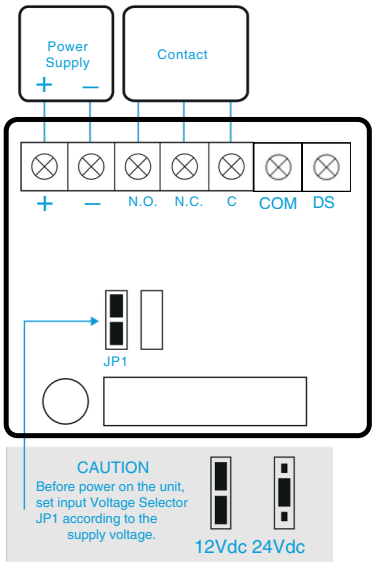

SPECIFICATION

- Voltage tolerance: ±10%.
- Current draw: 480mA at 12Vdc, 240mA at 24Vdc *(at temperature 20°C)*.
- Operating temperature: -10~55°C *(14 to 131°F)*.
- Lock's surface temperature: Current temperature ±20% *(when power is on)*.
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 2.0kg *(approx)*.

All dimensions in mm