A10002G Monitored

Monitored Mini Magnet


- Operating voltage 12~24Vdc *(Selectable)*
- Aluminium housing
- Holding force up to 600lbs *(272Kg)*
- Electro-less Nickel Plated Armature
- Fail-Safe
- Status LED ● Red ● Green




OPTIONS



All brackets are available in Gold Finish

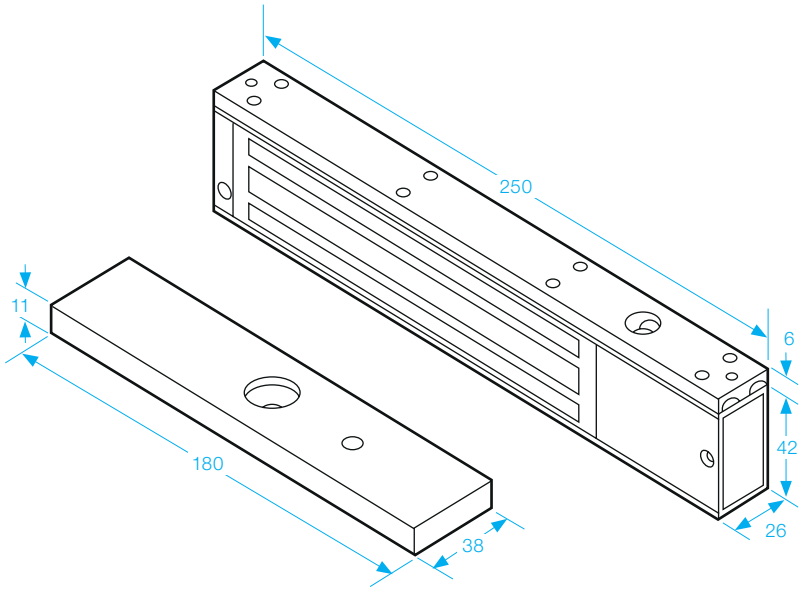

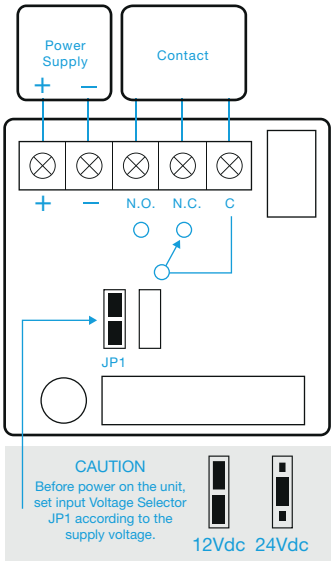

SPECIFICATION

- Voltage tolerance: ±10%.
- Current draw: 480mA at 12Vdc, 240mA at 24Vdc *(at temperature 20°C).*
- Operating temperature: -10~55°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. *(N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 0.25A at 12Vdc).*
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 2.0kg *(approx).*