FR-GD650S-12 12 VDC

FR-GD650S-24 24 VDC

Door Retaining Magnet


UK TESTED TO BS EN1155


UK FIRE TESTED BS EN1634:1 FD30 & FD60 DOORS

- FD30 + FD60 Rating
- Stainless Steel
- Electrically tested: BS EN1155
- Operating voltage 12 or 24Vdc
- Up to 70lbs *(32kg)* holding force
- Over-ride switch
- Flush mount
- 1 Hour UK fire certificate

STAINLESS STEEL | BS EN1634:1 | BS EN1155



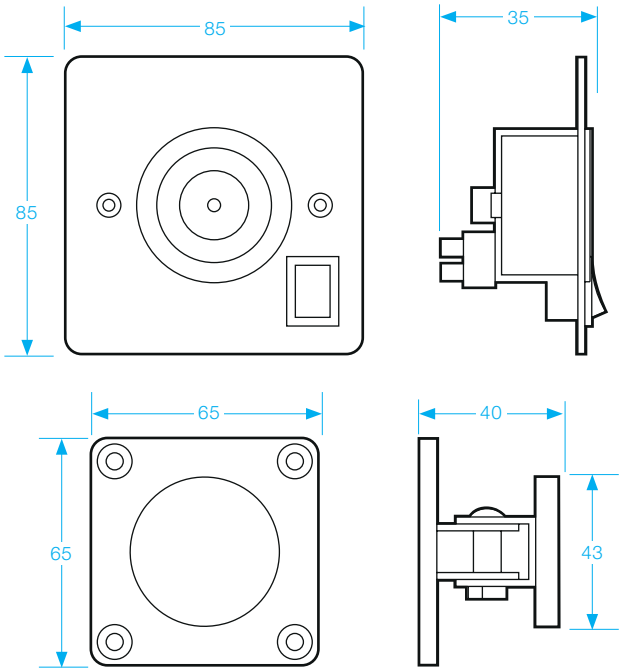

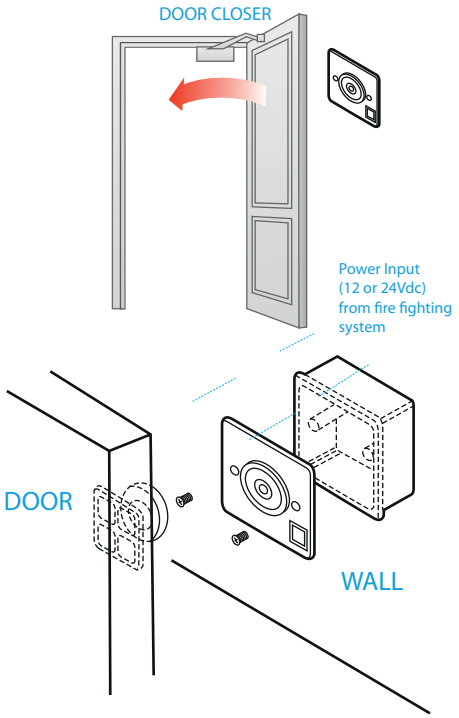

SPECIFICATION

- Voltage tolerance: ±15%.
- Current draw: 150mA at 12Vdc, 70mA at 24Vdc *(at temperature 20°C).*
- Operating temperature: -10~45°C *(14 to 131°F).*
- Humidity: 0~95% non-condensing.
- Weight: 380g *(approx).*