# N10001ST UNMONITORED

# N10001STM MONITORED

## Mini Stainless Steel Magnet

- Operating voltage 12Vdc
- Stainless Steel housing
- Holding force up to 600lbs *(272Kg)*
- Weather resistant: IP65
- Vandal resistant
- Standard fix

WEATHER RESISTANT – **IP 65** –


VANDAL RESISTANT

STAINLESS STEEL



**OPTIONS**

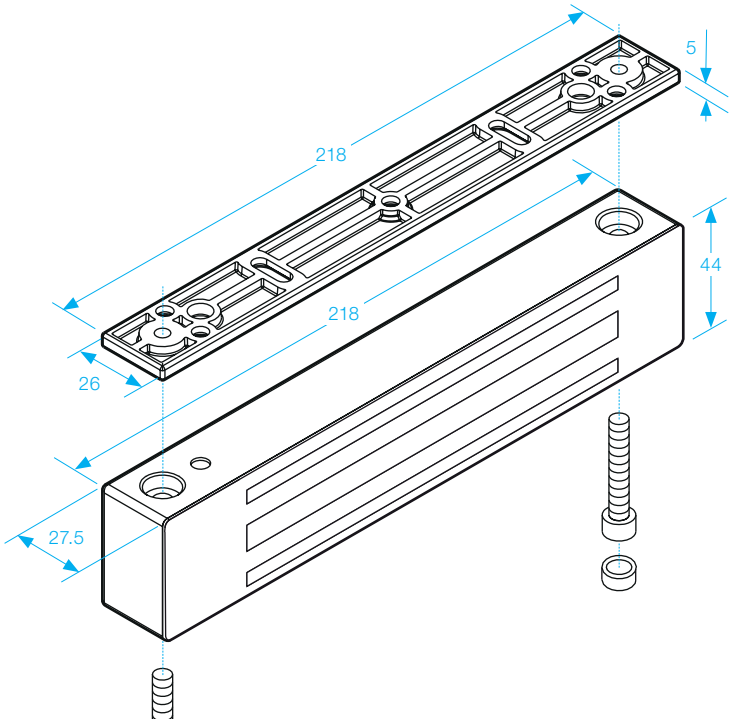


### WATERPROOF PROPERTIES

This series of waterproof magnetic locks are sealed with an epoxy potting compound (E87252 (S), UL94V-0) and is protected by this compound. They are proved to withstand a water resistance as established in test procedures of IP 65.



**SPECIFICATION**

- Voltage tolerance: ±15%.
- Current draw: 340mA at 12Vdc *(at temperature 20°C).*
- Operating temperature: -10~55°C *(14 to 131°F).*
- Lock's surface temperature: Current temperature ±20% *(when power is on).*
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. *(N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 0.25A at 12Vdc).*
- Humidity: 0~95% non-condensing.
- Special Zinc finish for magnet and armature plate.
- Weight: 3.5kg *(approx).*