

ASL951BW Range OnDoor Smartlock MIFARE™ Network System



The SmartLock ASL951BW range is a wireless networked system offering all the advantages of the standalone system with the benefit of wireless networking.

The RFID technology offers an easy to use and secure access solution ideal for medium to large installations. The system includes a battery powered door mounted lock, plus mains powered controller to control the electric locking mechanisms, lifts, barriers etc. and management software.


Certification

Fire rated for 60 min. to EN1634-1:2014 on composite timber door.

Intertek Report No. 141222001SHJ-BP-1
Dated 23RD Jan 2015

Certified to EN14846:2008
Classification Code 3-S-5-1-0-J-3-1-2
Intertek Report No. 131014059GZU-001
Dated 14th Oct 2013

CE approved

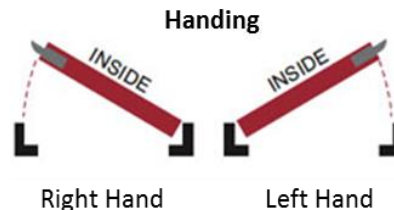

Features & Benefits

- Lock case has 65mm backset with 93.5mm crs
- Centralised card programming using easy to use Windows based software
- Real time card cancellation and logging
- Fault and battery condition reporting
- Up to 64 locks / doors can be controlled by each base station
- Up to 10,000+ user cards per system
- Each card can be programmed with access to doors, groups and areas with time and date validity and shift control
- Base stations use either Ethernet or USB to communicate around the building with a wireless link to the locks
- Door controllers for electric locking can control 2 doors with the same authorities or read in/read out
- ISO printable or pre-printed cards, tokens ,etc.
- Cards can be used for multiple sites and multiple applications
- Can be set up remotely or on site
- Web browser version available
- Interfaces with leading brand PMS systems

Ideal for:-

Medium to large systems such as hotels, universities, colleges and schools, offices, hospitals and residential accommodation.

Code	Description
ASL951BW-L	SmartLock Wireless Hotel Lockset with key override (Left Handed)
ASL951BW-R	SmartLock Wireless Hotel Lockset with key override (Right Handed)

The SmartLock ASL951BW range can also be used as standalone allowing you to mix and match.

ASL951BW Range OnDoor Smartlock MIFARE™ Network System

Features & Benefits	SmartLock Wireless Hotel System ASL951BW
No hardwiring	•
Dead bolt for added security thrown on the inside by thumb turn	•
Powered by 4 standard AA batteries	•
Outside Lever Handle free when locked	•
Key override from the outside	•
Low battery indicator	•
Euro and ANSI lock case options	•
Mifare plus and Desfire ready	•
Cards can be used for multiple sites and multiple applications	•
Networking	•
Instant card cancelling	•
Real-time logging	•
Management system including reader / writer, wireless dongle and software	ASL957
Additional stations	ASL953
Single Door Controller Unit including 3 Amp PSU and reader	ASL950M1W
Two Door Controller Unit including 3 Amp PSU and reader	ASL950M2W
Cards	ASL954/1
PMS interface	ASL955
Base station for up to 64 doors – Ethernet / USB	ASL95BASE
Base station up to 64 doors -Wi-Fi	ASL95BASEW

Features & Benefits

